

6FM7



13FM7, 15FM7

Color Television Type

VERTICAL DEFLECTION  
OSCILLATOR and AMPLIFIER

Double Dissimilar Triode

Construction.....Compactron T-9  
Base .....Button 12 Pin, E12-70  
Basing .....12EJ  
Outline .....9-58  
Maximum Diameter .....1.188 In.  
Maximum Seated Height .....2.000 In.  
Maximum Overall Height .....2.375 In.



ELECTRICAL DATA  
HEATER OPERATION

	15FM7	13FM7	6FM7
Heater Voltage.....	14.8	13.0	6.3 Volts
Heater Current.....	450	450	1005 Ma
Heater Warm-up Time.....	11	11	— Seconds
Maximum Heater-Cathode Voltage			
Heater Negative with Respect to Cathode			200 Volts
Total DC and Peak.....			
Heater Positive with Respect to Cathode			
DC.....			100 Volts
Total DC and Peak.....			200 Volts


DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

	Section No. 1	Section No. 2
Grid to Plate.....	4.0	7.0 Pf
Input: g to (h + k).....	2.4	7.0 Pf
Output: p to (h + k).....	0.40	1.1 Pf


RATINGS (Design Maximum Rating System)  
Vertical Deflection Oscillator and Amplifier<sup>(1)</sup>

	Section <sup>(2)</sup> No. 1 Oscillator	Section <sup>(2)</sup> No. 2 Amplifier
Plate Voltage (Max.).....	350	550 Volts
Peak Positive Pulse Plate Voltage (Max.).....	—	1500 Volts
Peak Negative Pulse Grid Voltage (Max.).....	400	250 Volts
Plate Dissipation (Max.) <sup>(3)</sup> .....	1.0	10 Watts
Average Cathode Current (Max.).....	—	50 Ma
Peak Cathode Current (Max.).....	—	175 Ma
Grid Circuit Resistance, Self Bias (Max.).....	2.2	2.2 Megohms

AVERAGE PLATE CHARACTERISTICS  
(Section No. 1)

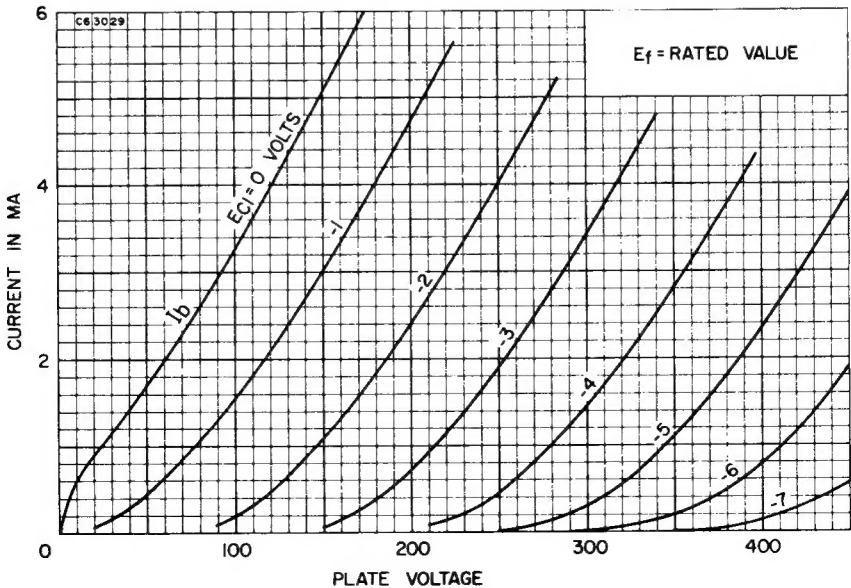

AVERAGE PLATE CHARACTERISTICS  
(Section No. 2)

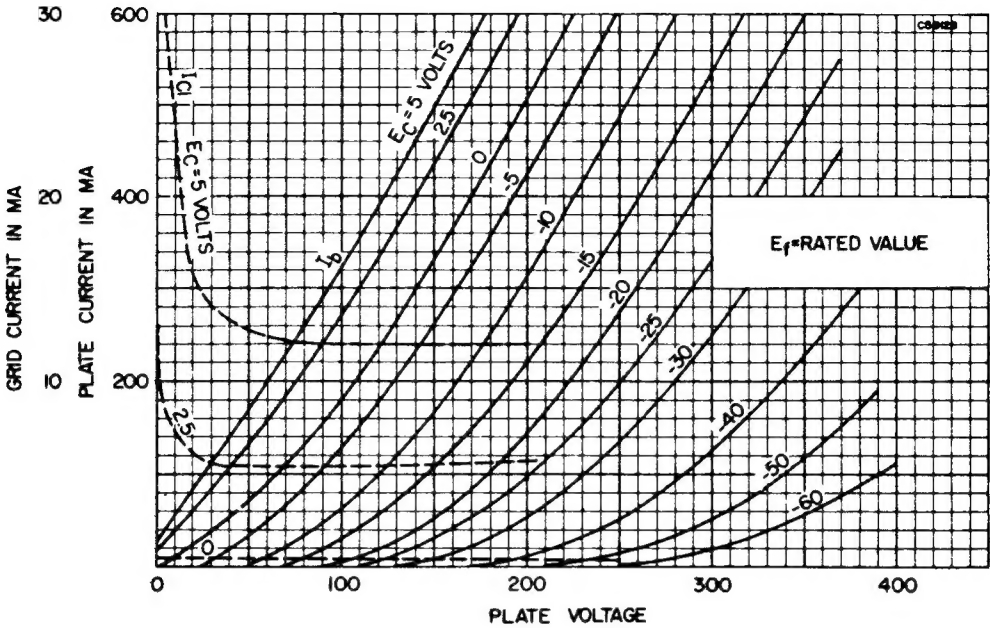

CHARACTERISTICS AND TYPICAL OPERATION

	Section No. 1	Section No. 2
Plate Voltage .....	250	175 Volts
Grid No. 1 Voltage .....	-3	-25 Volts
Plate Current .....	2.0	40 Ma
Transconductance .....	2200	6000 $\mu$ mhos
Amplification Factor .....	66	5.5
Plate Resistance (Approx.) .....	30,000	920 Ohms
$E_c$ for $I_b = 20 \mu a$ (Approx.) .....	-5.3	— Volts
$E_c$ for $I_b = 200 \mu a$ (Approx.) .....	—	-45 Volts

NOTES:

- (1) For operation in a 525 line, 30 frame system as described in "Standards of Good Engineering Practice for Television Broadcast Stations; Federal Communications Commission," the duty cycle of the voltage pulse not to exceed 15% of one horizontal scanning cycle.
- (2) Section No. 1 connects to Pins 6, 7 and 8. Section No. 2 connects to Pins 1, 2, 3, and 9.
- (3) In stages operating with grid leak bias, an adequate bias resistor or other suitable means is required to protect the tube in the absence of excitation.